


PMA3

MIXING
MONITOR
SYSTEM

PMA3-8, PMA3-10

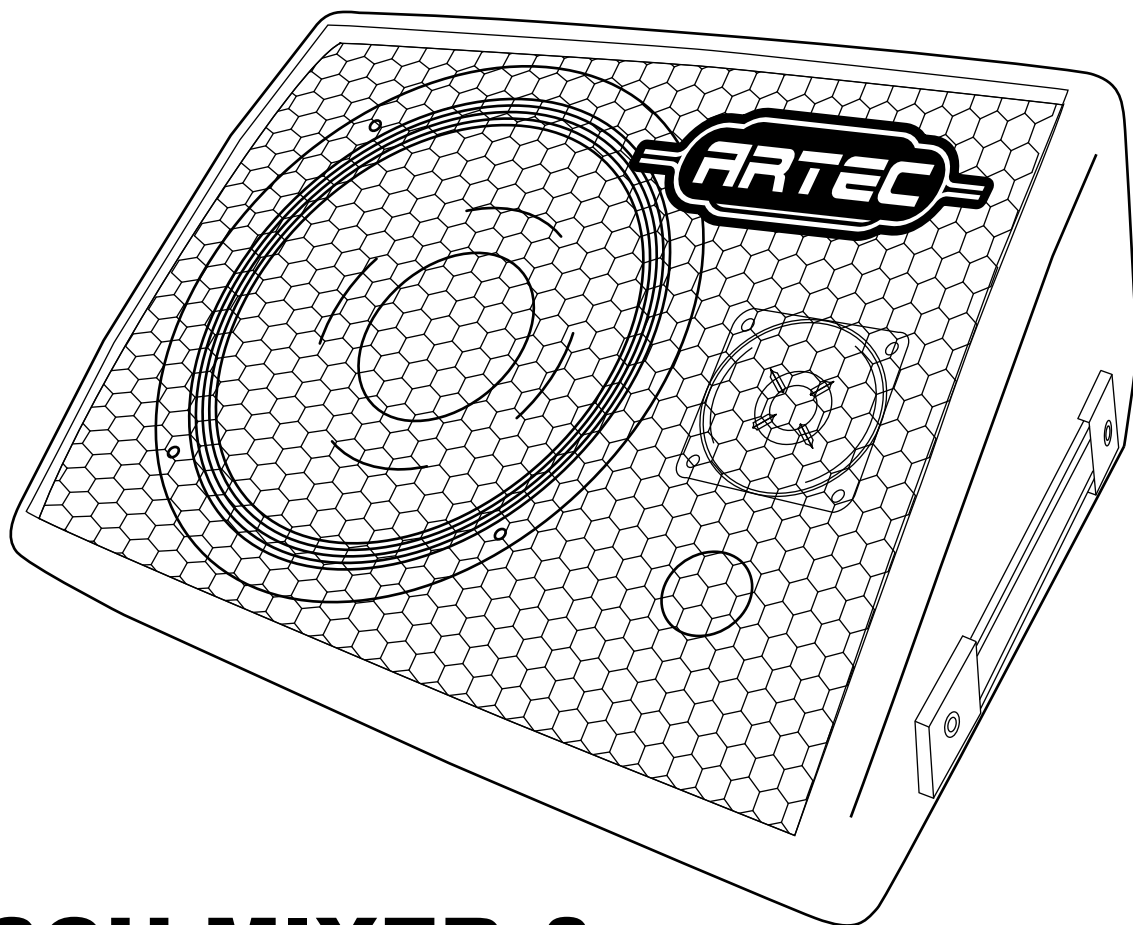

**3CH MIXER &
25W POWERED MONITOR**

**DMOS
FET**

XLR

RCA

BAL/UNBAL

**3CH
MIXER**


**STAND
ACCESS**

EQ
- GAIN
- TREBLE
- BASS



FULL RANGE

ARTEC

CONTROL PANEL

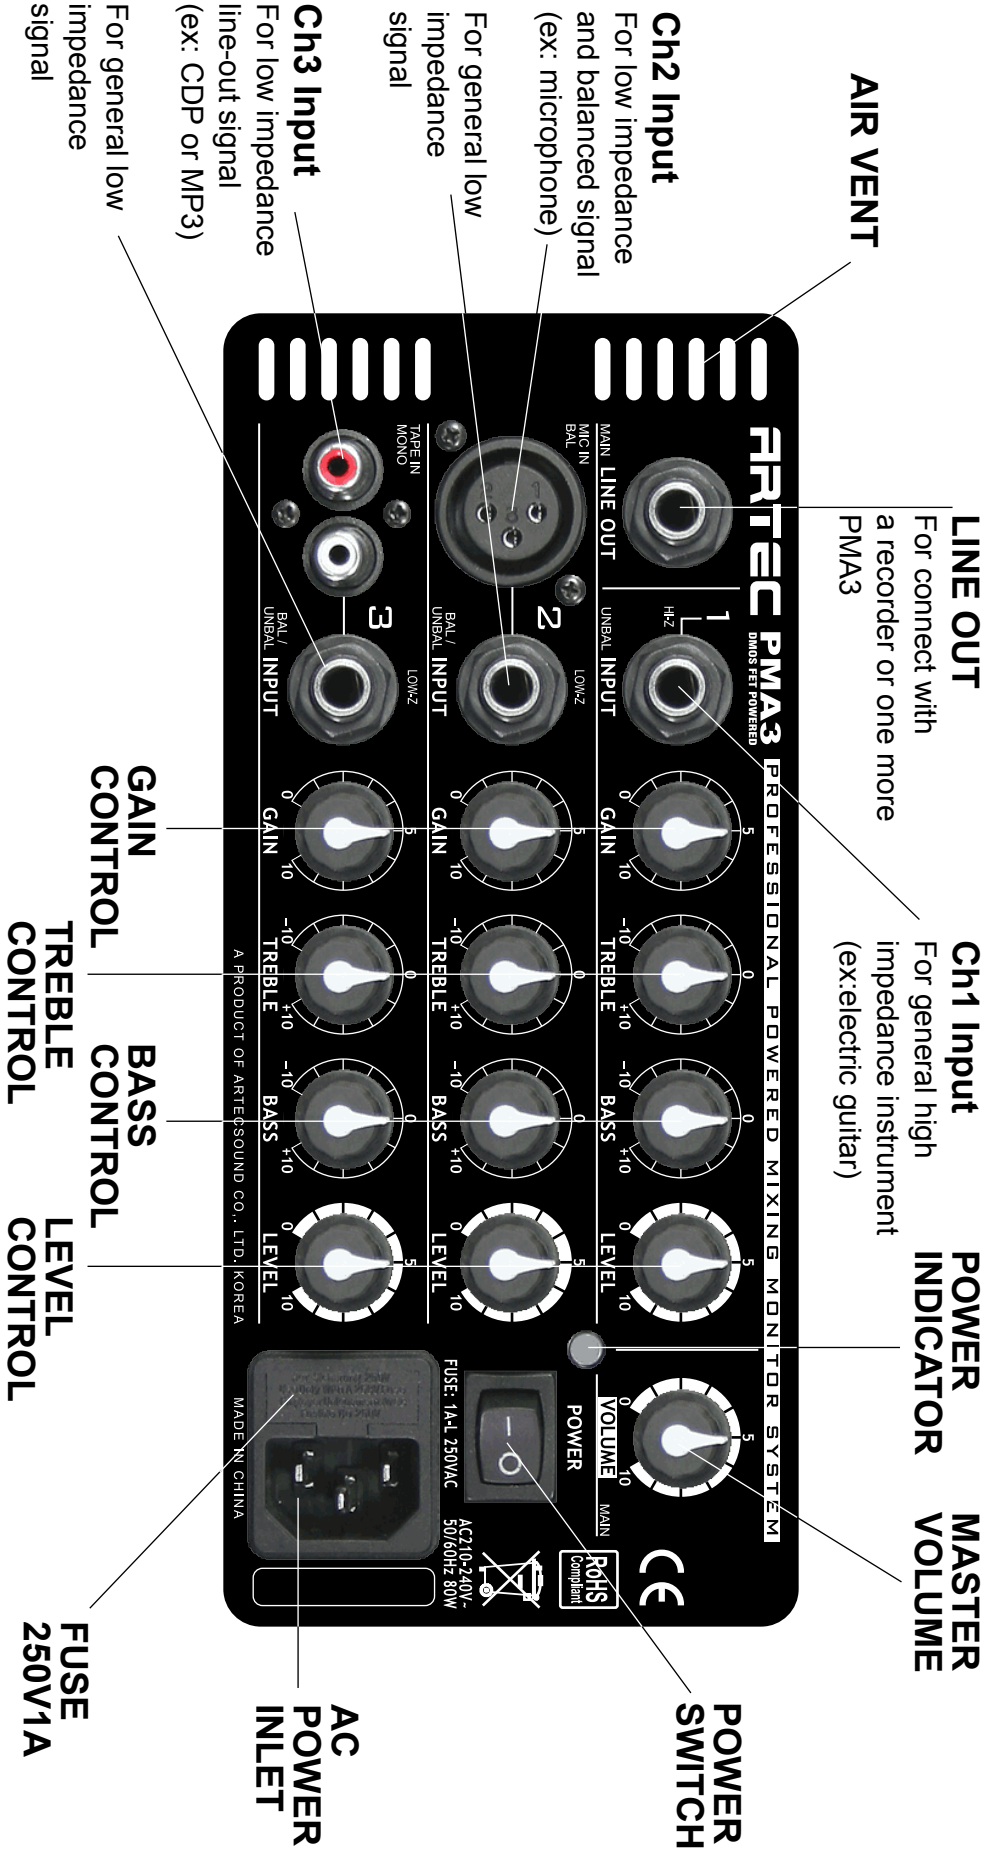


PMA3 BLOCK DIAGRAM

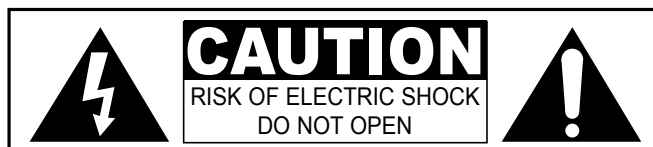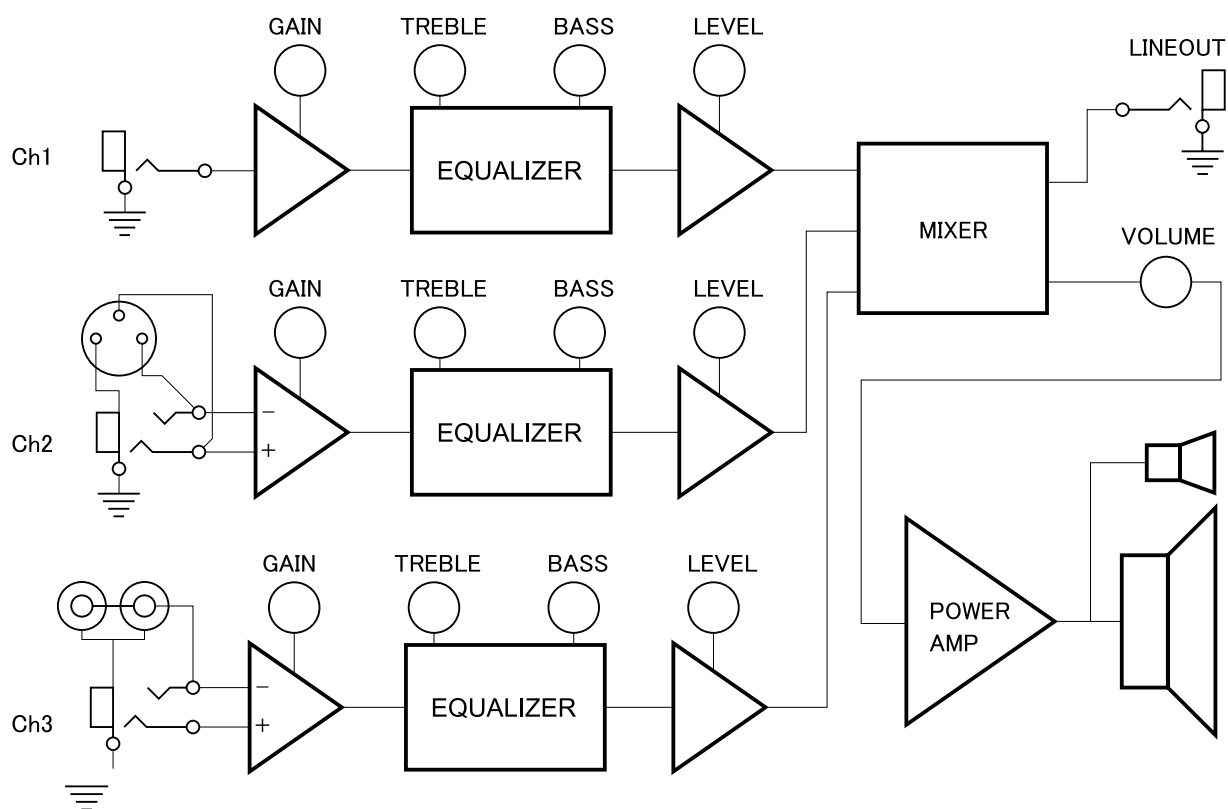


IMPORTANT SAFETY INSTRUCTIONS

- DO NOT OPERATE NEAR ANY HEAT SOURCE AND DO NOT BLOCK ANY VENTILATION OPENINGS ON THIS APPARATUS.
- ONLY CONNECT POWER CORD TO A POLARIZED, SAFETY GROUNDED OUTLET WIRED TO CURRENT ELECTRICAL CODES AND COMPATIBLE WITH VOLTAGE, POWER, AND FREQUENCY REQUIREMENTS STATED ON THE REAR PANEL OF THE APPARATUS.
- ONLY USE ATTACHMENTS, ACCESSORIES, STANDS, OR BRACKETS SPECIFIED BY THE MANUFACTURER FOR SAFE OPERATION AND TO AVOID INJURY.
- WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK OR FIRE, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.
- SERVICE MUST BE PERFORMED BY QUALIFIED PERSONNEL.
- OUR AMPLIFIERS ARE CAPABLE OF PRODUCING HIGH SOUND PRESSURE LEVELS. CONTINUED EXPOSURE TO HIGH SOUND PRESSURE LEVELS CAN CAUSE PERMANENT HEARING IMPAIRMENT OR LOSS. USER CAUTION IS ADVISED AND EAR PROTECTION IS RECOMMENDED IF UNIT IS OPERATED AT HIGH VOLUME.

SPECIFICATION

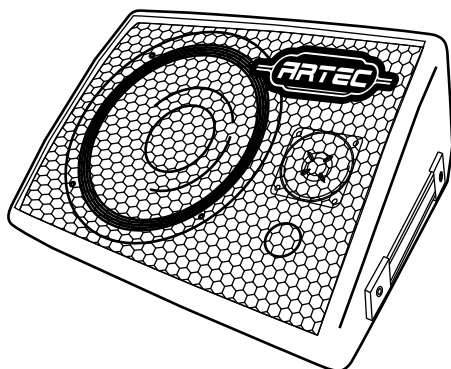

PMA3-8

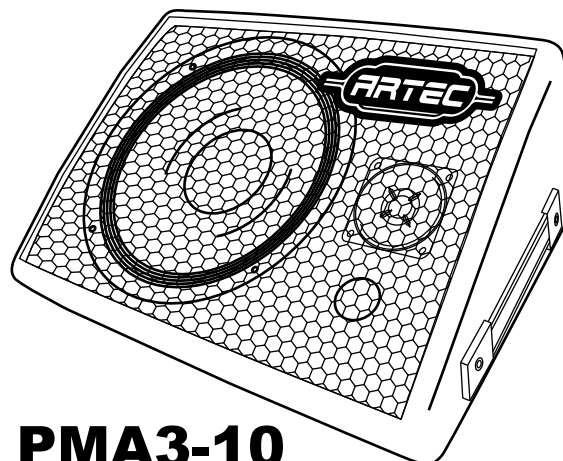

PMA3-10

200 x 360 x 310 (mm)	DIMENSION	250 x 440 x 380 (mm)
8 inch LF + 1 inch HF	SPEAKER	10 inch LF + 1 inch HF
25 watts music power	OUTPUT	35 watts music power
60W @ 230V50Hz	AC POWER	80W @ 230V50Hz

	Input impedance	Max. input level	max. gain
Ch 1 1/4inch jack	500kohm	+8dBV	70dB
Ch 2 XLR jack	50kohm	+10dBV	60dB
Ch 2 1/4inch jack	50kohm	+10dBV	60dB
Ch 3 RCA jack	50kohm	+10dBV	60dB
Ch 3 1/4inch jack	50kohm	+10dBV	60dB

- Equalizer (common)

Bass : -10dB ~ +10dB @ 180Hz

Treble : -10dB ~ +10dB @ 2kHz

- Lineout

1/4inch jack

output impedance : 2kohm

- Output frequency range

50Hz ~ 12kHz

- Stand Access Hole

35mm (diameter)